



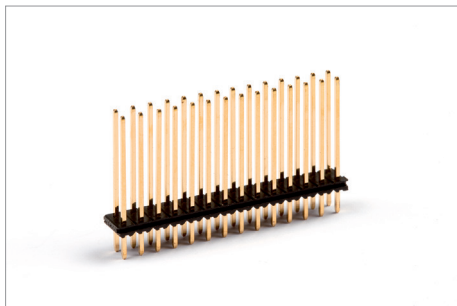

(N= Number
of contacts)

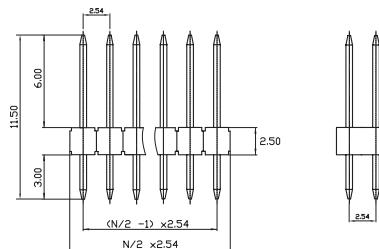

Features

Breakable header
Insulator profile 2.54 mm
Pin side dimension 0.64 mm

Material

Insulator:
High temperature thermoplastic
UL 94V0
Contact: Copper alloy

Electrical

Current rating: 3A maxi
Dielectric withstanding: 1000 V AC
Insulation resistance: 1000 MΩ mini

Mechanical

Temperature rating:
-40 °C to 105 °C

Product Code

A	B	C	D
473	9750	1xx	4x0

B

Plating
0 Gold 0.25 μm
1 Gold flash
4 Tin
7 Selective gold