


MALE HEADER RIGHT ANGLE DOUBLE ROW

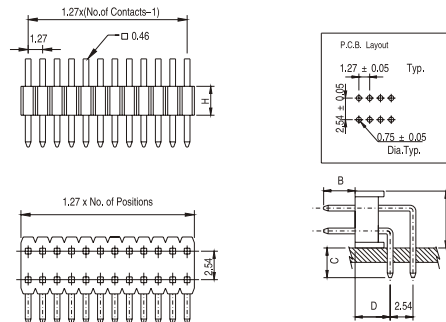

Features	Breakable header 1.27x2.54 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D
474	826x	5xx	2x0

B	Standard connectors: view table
C	Number of contacts from 06 to 100 (for 100 mark 00)
D	Plating 1 Gold flash 4 Tin 6 Selective gold flash

	B	C	D
8260	3	5.8	3.9
8261	3.1	3.5	1.3