


STRIP HEADERS

MALE HEADER RIGHT ANGLE DOUBLE ROW

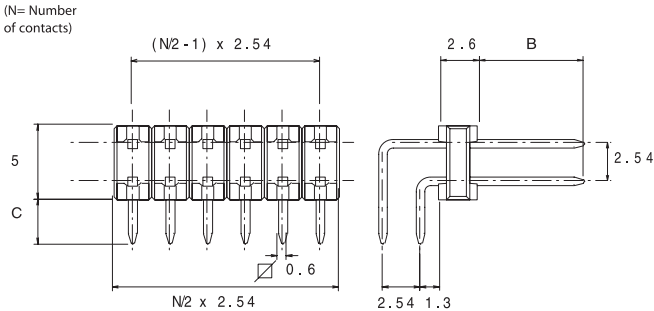

Features	Breakable header
	Insulator profile 2.6 mm
	Pin side dimension 0.6 mm
Material	Insulator:
	High temperature thermoplastic
	UL 94V0
	Contact: Phosphor bronze
Electrical	Current rating: 4A maxi
	Dielectric withstanding: 1000 V AC
	Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating:
	-40° C to 125 °C
	Pc board Hole diameter Ø 1 mm
Packaging	Recyclable cardboard boxes

Product Code

A	B	C	D
474	xxxx	1xx	4x0

B	Version
C	Number of contacts from 02 to 80
D	Plating
	0 Gold
	0.2 µm over Ni 1.27 µm
	4 Tin 4 µm over Ni 1.27 µm
	Other platings on demand

Version	B	C
2160	3.3	3.4
2280	5.8	3.3
1965	6.0	3.8
1845	7.0	3.0
1984	8.1	3.5
1983	5.8	5.8