
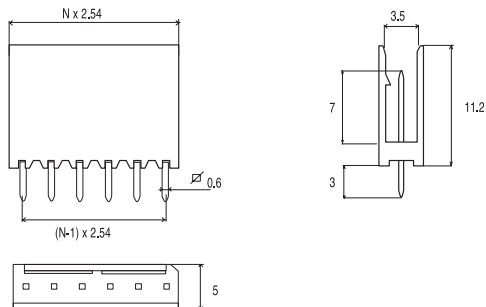


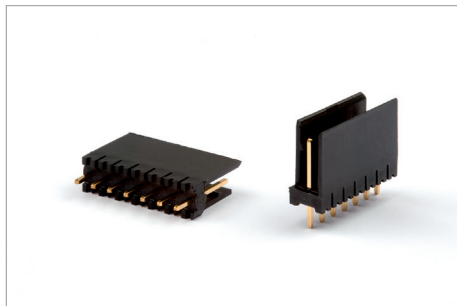

Features	Polarized header with friction lock Pitch 2.54 mm
Material	Insulator: Black thermoplastic GF UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 4 A maxi Dielectric withstanding: 500 V AC Insulation resistance: 10000 MΩ mini
Mechanical	Temperature rating: -40 °C to 125 °C
Packaging	Recyclable cardboard boxes

Product Code

A	B	C	D
475	0334	1xx	4x0

C Number of contacts 02, 03, 04, 05, 08, 10

D Plating
0 Gold 0.2 μm over Ni 1.27 μm
4 Tin 4 μm over Ni 1.27 μm
7 Selective Gold 0.2 μm over Ni 1.27 μm
Other platings on demand