
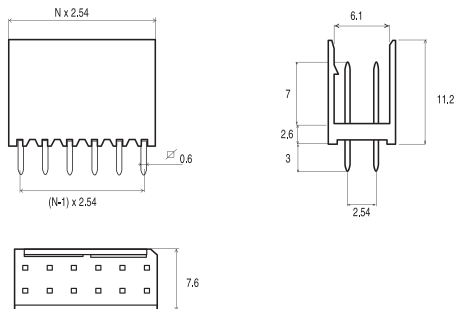


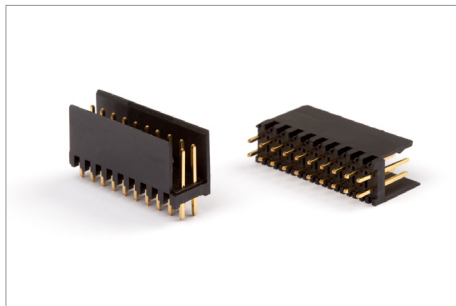

Features	Polarized header with friction lock Pitch 2.54 mm
Material	Insulator: Black thermoplastic GF UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 4 A maxi Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating: -40 °C to 125 °C
Packaging	Recyclable cardboard boxes

Product Code

A	B	C	D	E	F
475	1848	1	xx	4x0	-1

D Number of contacts from 04 to 40

E Plating
0 Gold plating 0.2 μm over Ni 1.27 μm
4 Tin plated 4 μm over Ni 1.27 μm
7 Selective Gold plating 0.2 μm over Ni 1.27 μm
Other plating upon request