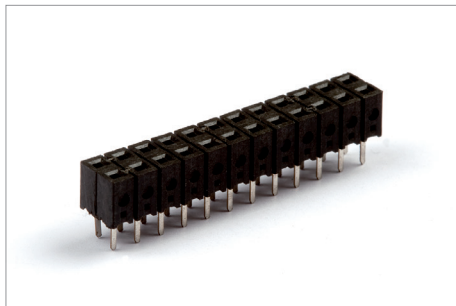


Features	Top entry breakable socket Body height 4.6 mm
Material	Housing: High temperature thermoplastic UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 3A maxi Dielectric withstanding: 1000 V Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ
Mechanical	Temperature rating: -40 °C to 125 °C
Packaging	Plastic tubes (220 contacts per stick)

Product Code

A	B	C	D	E
477	xxxx	1	xx	4x0

B

Number of row
2845 Single row
3001 Double row

D

Number of contacts
from 02 to 25 single row
from 04 to 50 double row

E

Plating
0 Selective Gold plating 0.2 μm
over Ni
4 Tin 4 μm
9 Selective Gold plating 0.8 μm
over Ni