
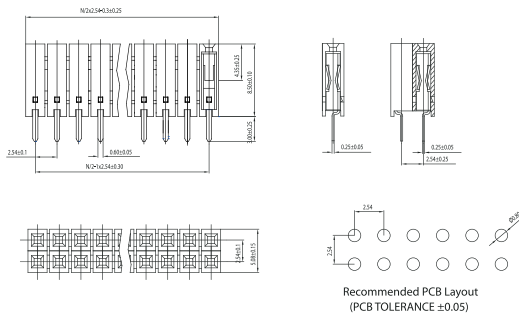


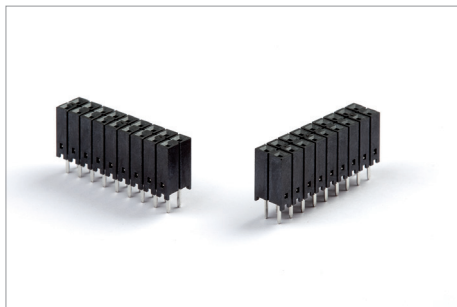

Features	Top entry modular connector Pitch 2.54 mm
Material	Insulator: LCP UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 3A maxi Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D
477	820x	1xx	4x0

B	Number of row 5 Single row 1 Double row	D	Plating 4 Tin 7 Selective Gold over Ni
C	Number of contacts from 02 to 45 single row from 04 to 90 double row		