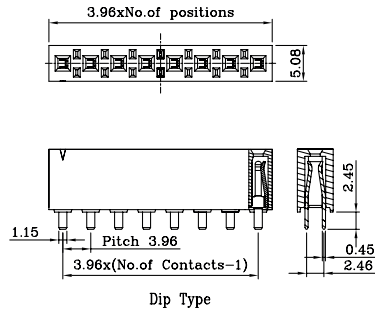
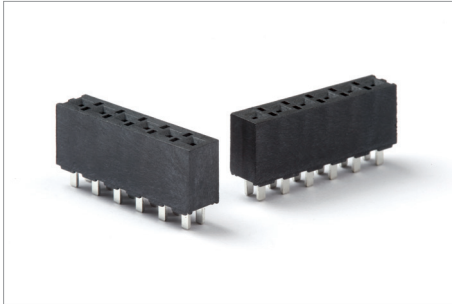


Features	Pitch 3.96 mm Socket
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper Alloy
Electrical	Current rating: 8.2 A Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating: from -40 °C to 105 °C
Packaging	Tube

Product Code

A	B	C	D
477	8219	8xx	4x0

B	Number of contacts from 02 to 24
C	1 Gold flash 4 Tin