
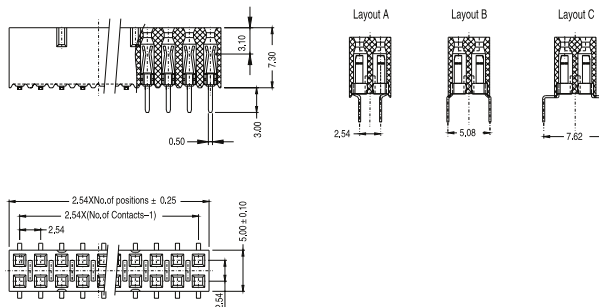


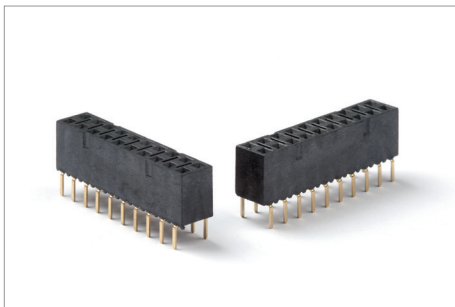

Material	Insulator:
	High temperature thermoplastic UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 3A maxi
	Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ
Mechanical	Temperature rating:
	-40 °C to 105 °C

Product Code

A	B	C	D
477	823x	1xx	4x0

B	Layout 1: 2.54 mm 2: 5.08 mm 3: 7.62 mm
C	Number of contacts from 04 to 80
D	Plating 1 Gold flash 4 Tin 6 Selective gold flash