
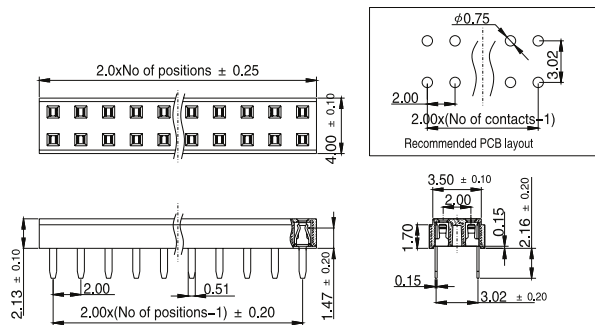


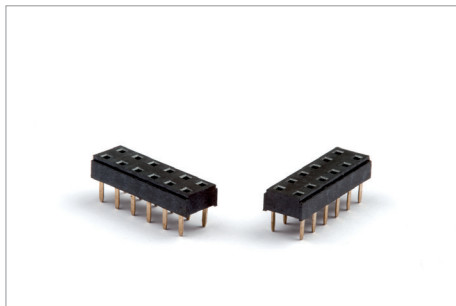

|                   |                                                                                                                                 |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <b>Features</b>   | Body height 2.13 mm                                                                                                             |
| <b>Material</b>   | Insulator:<br>High temperature thermoplastic<br>UL 94V0<br>Contact: Phosphor bronze                                             |
| <b>Electrical</b> | Current rating: 1A<br>Dielectric withstanding: 500 V AC<br>Insulation resistance: 1000 MΩ mini<br>Contact resistance: 20 mΩ max |
| <b>Mechanical</b> | Temperature rating:<br>-40 °C to 105 °C                                                                                         |

### Product Code

| A   | B    | C   | D   |
|-----|------|-----|-----|
| 477 | 8285 | 6xx | 4x0 |

|          |                                                            |
|----------|------------------------------------------------------------|
| <b>C</b> | Number of contacts from 04 to 80                           |
| <b>D</b> | Plating<br>1 Gold flash<br>4 Tin<br>6 Selective gold flash |