
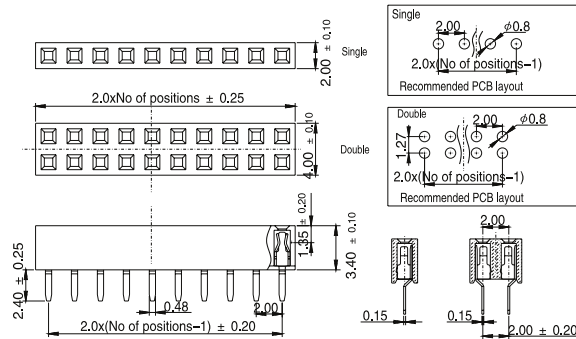


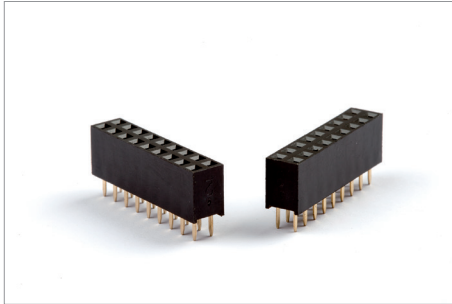

Features	Body height 3.4 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 1A Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ max
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D
477	828x	6xx	4x0

B

Number of row
6: Single row
7: Double row

C

Number of crontacts:
Single row from 03 to 40
Double row from 06 to 80

D

Plating
1 Gold flash
4 Tin
6 Selective gold flash