
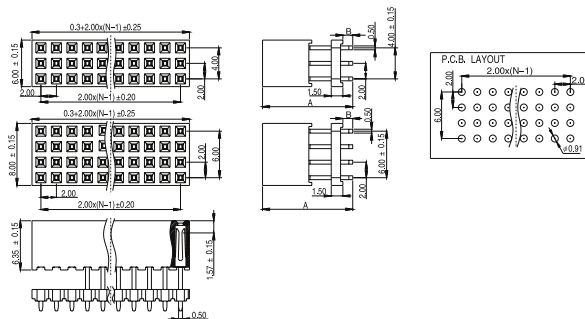


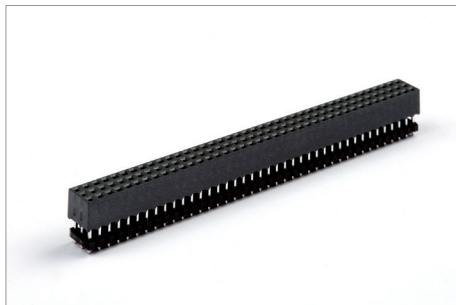

Features	Elevated socket
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ max
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D	E	F
477	8297	x	xx	4x	x

C	Number of Row C: Triple row D: Four row
D	Number of contact per row From 02 to 40 contact per row
E	Plating 1 Gold flash 4 Tin 6 Selective gold flash

F

Standard dimension, please refer to the table

	A	B
1	9.35	1.27
2	11.63	1.27
3	12.34	1.27
4	21.59	1.27