
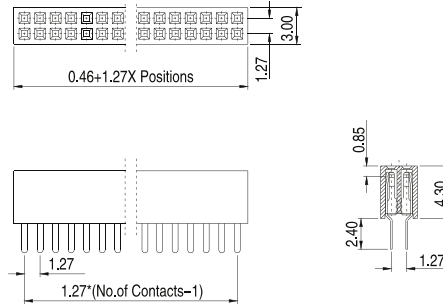


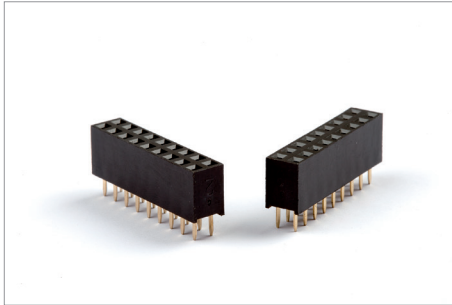

Features	Socket 1.27x1.27 mm Body Height 4.3 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini Contact resistance: 20 mΩ max
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Tube

Product Code

A	B	C	D
477	8311	5xx	4x0

C	Number of contacts from 06 to 100 (for 100 mark 00)
D	Plating 1 Gold flash 4 Tin 6 Selective gold flash