
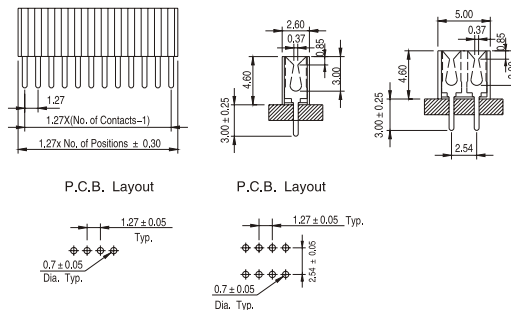


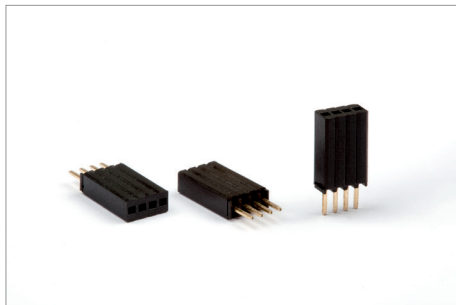

Features	Socket connector 1.27x2.54 mm Body height 4.6 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini Contact resistance: 20 mΩ max
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D
477	831x	5xx	4x0

B	Row selection 2: Single row (40 position max) 3: Double row (100 Position max)
C	Number of contacts from 02 to 100 (for 100 mark 00)
D	Plating 1 Gold flash 4 Tin 6 Selective gold flash