
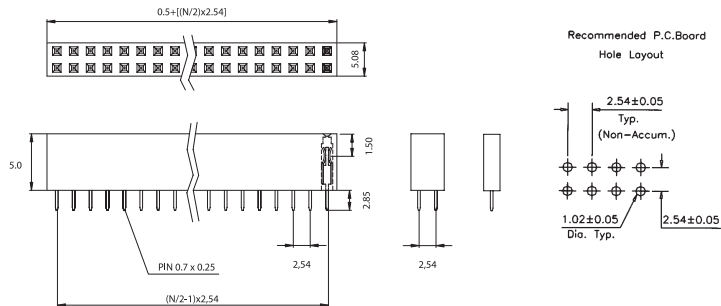


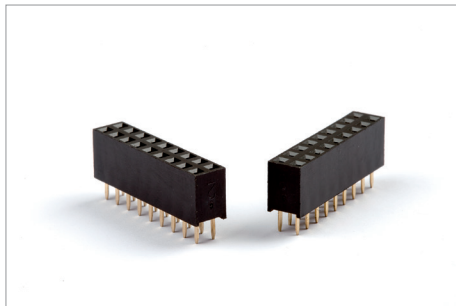

|                   |                                                                                                                                  |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Features</b>   | Body height 5.0 mm                                                                                                               |
| <b>Material</b>   | Insulator: PA UL 94V0<br>Contact: Phosphor bronze                                                                                |
| <b>Electrical</b> | Current rating 3A maxi<br>Dielectric withstanding: 1000 V AC<br>Insulation resistance: 1000 MΩ mini<br>Contact resistance: 20 mΩ |
| <b>Mechanical</b> | Temperature rating:<br>-40 °C to 105 °C                                                                                          |

### Product Code

| A   | B    | C   | D   |
|-----|------|-----|-----|
| 477 | 972x | 1xx | 4x0 |

**B**

Number of row  
0 Single row  
4 Double row

**C**

Number of contacts  
from 03 to 40 single row  
from 04 to 80

**D**

Plating  
0 Gold 0.25 μm  
1 Gold flash  
4 Tin  
7 Selective gold  
6 Selective gold flash  
6 Gold 0.75 μm