
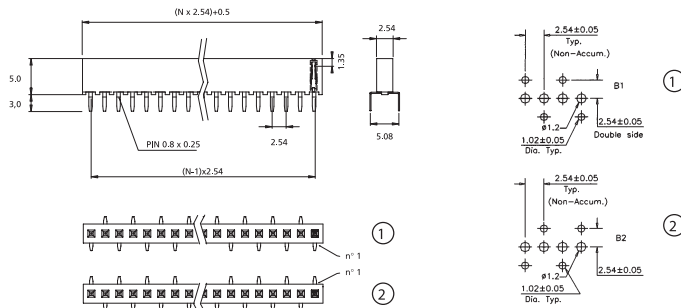


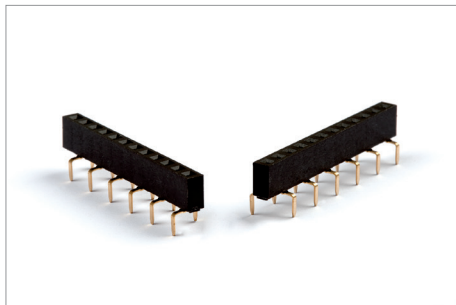

Features	Dual entry body height 5.0 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 3A maxi Dielectric withstanding: 1000 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D	E
477	9721	1xx	4x	x

C	Number of contacts from 03 to 30
D	Plating 0 Gold 0.25 μm 1 Gold flash 4 Tin 7 Selective gold
E	Position of the first pin (see below 1 or 2) 0 all pin on same side