
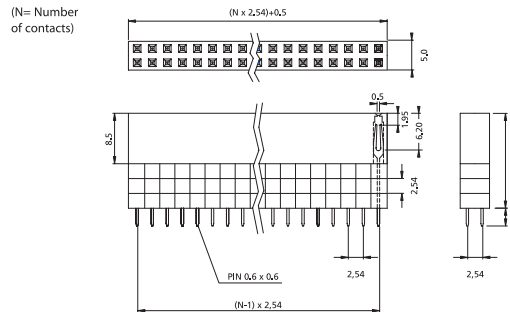


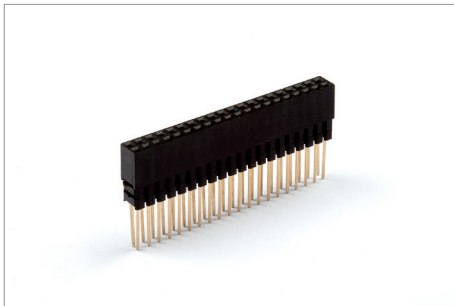

Features	Elevated socket
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 3A maxi Dielectric withstanding: 1000 V Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D	E	F
477	9723	1	xx	4x	x

D	Number of contacts from 04 to 80
E	Plating 0 Gold 0.25 μm 1 Gold flash 4 Tin 7 Selective gold
F	Options for foot lenght and plastic height: see table

x	A	B
1	11.05	3
2	11.05	8.1
3	13.59	5.6
4	16.13	3
5	11.05	13
6	13.59	10.6
7	16.13	8
8	18.67	5.5