



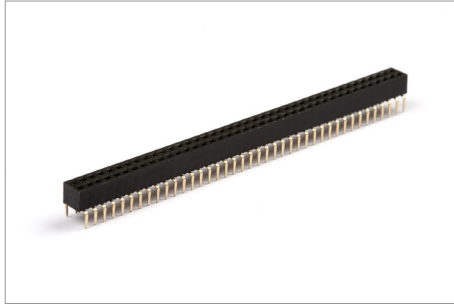

(N= Number
of contacts)

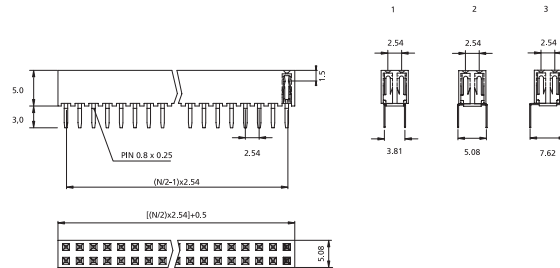

Features	Dual entry socket Body height 5.0 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Phosphore bronze
Electrical	Current rating: 3A maxi Dielectric withstanding: 1000 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D	E	F
477	9725	1	xx	4x	x

D	Number of contacts from 04 to 80
E	Plating 0 Gold 0.25 μm 1 Gold flash 4 Tin 7 Selective gold plating
F	Pitch between rows (type) 1 3.81 mm 2 5.08 mm 3 7.62 mm