
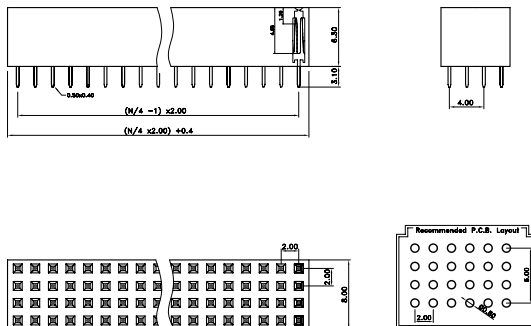


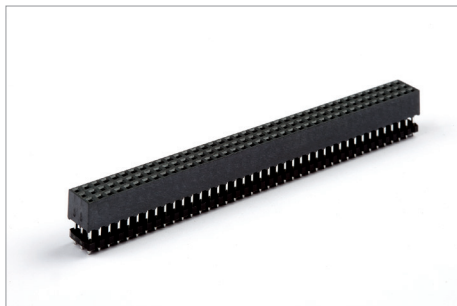

Features	Body height 6.3 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 1 000 MΩ mini Contact resistance: 20 mΩ max
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D	E
477	9731	C	xx	4x0

D Number of contacts per row from 06 to 30

E Plating
1 Gold flash
4 Tin
7 Selective gold plating
0 Gold 0.25 µm
6 Selective gold flash