
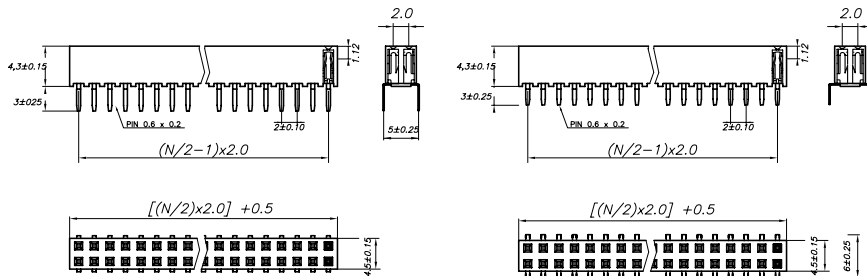


SOCKET CONNECTOR, STRAIGHT, DOUBLE ROW

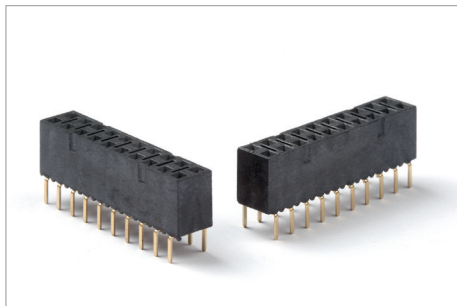

Features	Dual entry socket Body height 4.3 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ max
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D	E
---	---	---	---	---

477	9736	6xx	4x	x
-----	------	-----	----	---

C	Number of contacts from 06 to 80
----------	----------------------------------

D	Plating 1 Gold flash 4 Tin 7 Selective gold 0 Gold 0.25 μm 6 Selective gold flash
----------	--

E	Distance between rows 1 5.0 mm 2 6.0 mm
----------	---