
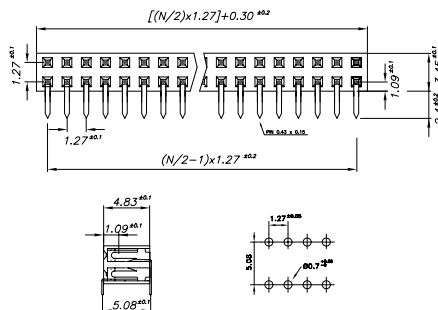


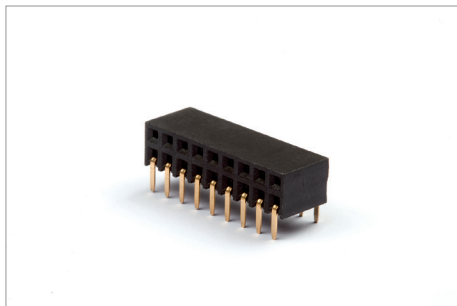

Features	Socket 1.27x1.27 mm Body height 3.45 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini Contact resistance: 20 mΩ
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D	E
477	9741	5	xx	4x0

D	Number of contacts from 10 to 50
E	Plating 1 Gold flash 4 Tin 7 Selective gold 6 Selective gold flash