
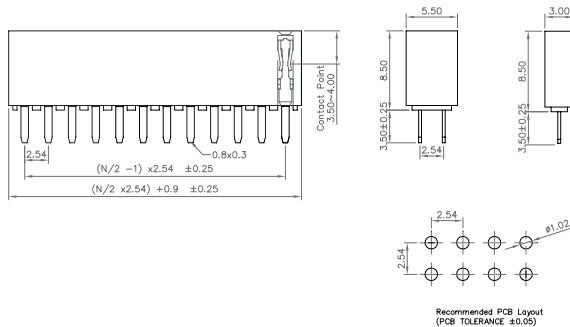


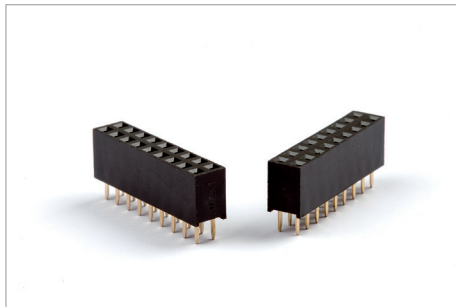

Features	Body height 8.5 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 3A maxi Dielectric withstanding: 1000 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D
477	97xx	1xx	4x0

B

Number of row
26 Single row
68 Double row

C

Number of contacts
from 03 to 40 single row
from 06 to 80 double row

D

Plating
0 Gold 0.25 μm
1 Gold flash
4 Tin
7 Selective gold