
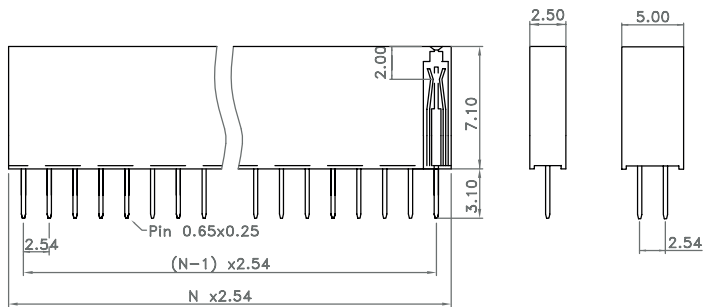


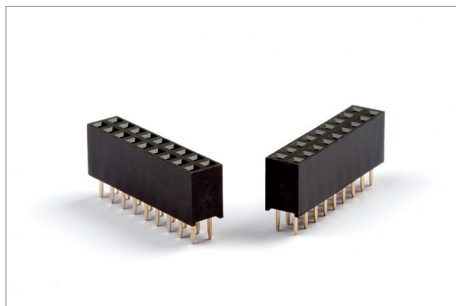

Features	Body height 7.1 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 3A maxi Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D	E
477	97xx	1	xx	4x0

B	Number of row 67 single row 70 double row
C	Number of contacts from 02 to 40 single row from 06 to 80 double row

E	Plating 0 Gold 0.25 μm 1 Gold flash 4 Tin 7 Selective gold 9 Gold 0.75 μm
----------	--