
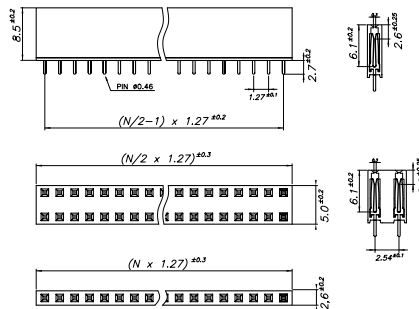


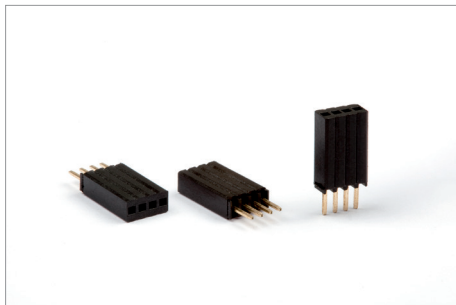

Features Socket connector 1.27x2.54 mm
Body height 8.5 mm

Material Insulator:
High temperature thermoplastic
UL 94V0
Contact: Phosphor bronze

Electrical Current rating: 1A maxi
Dielectric withstanding: 500 V AC
Insulation resistance: 500 M Ω mini
Contact resistance: 20 m Ω max

Mechanical Temperature rating:
-40 °C to 105 °C

Product Code

A	B	C	D
---	---	---	---

477	97xx	5xx	4x0
-----	------	-----	-----

B 79: Single row (max 36 position)
80: Double row (max 98 position)

C Number of contacts from 03 to 98

D Plating
1 Gold flash
6 Selective gold flash