
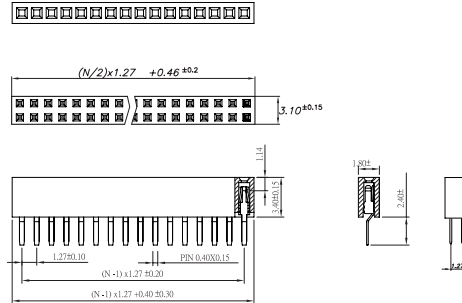


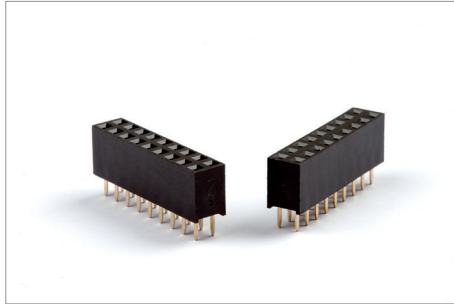

Features	Socket 1.27x1.27 mm Body height 3.4 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini Contact resistance: 20 mΩ max
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D
477	xxxx	5xx	4x0

B Number of row
9831 Single row
9705 Double row

C Number of contacts
from 03 to 36 for single row
from 06 to 100 for double row

D Plating
0 Gold 0.25 μm
1 Gold flash
4 Tin
6 Selective gold flash