


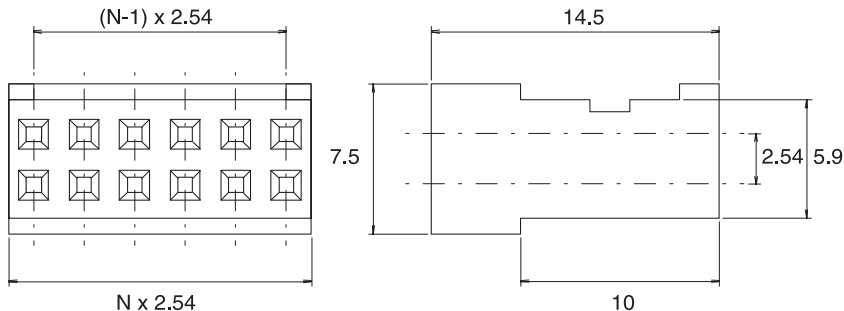

Features Double row housing
for crimping contact
Double Wipe Removable
contact AWG 22 - 24 - 26 - 28

Material Insulator:
Black glass filled polyester UL 94V0

Electrical Current rating: 3 A maxi
Dielectric withstanding: 500 V AC
Insulation resistance: 1000 MΩ mini
Contact resistance: 20 mΩ maxi

Mechanical Temperature rating:
-40 °C to 125 °C
Maximum Insulation
Diameter: Ø 1.45 mm

Packaging Recyclable cardboard boxes

Product Code

A	B	C	D
485	3401	0xx	740

C Number of contacts 08 or 10