


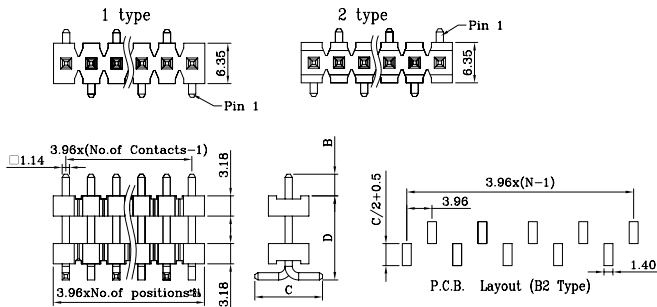

Features	Pitch 3.96 mm pin 1.14 mm Breakable header
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 8.2 A maxi 30 °C temperature rise Dielectric withstanding: 500V AC Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating: from -40 °C to 105 °C
Packaging	Tube or Tape and Reel

Product Code

A	B	C	D	E	F
668	821x	8xx	4x	x	-x

B	1: B=3.81 mm C=8.39 mm D=9.5 mm 2: B=12.7 mm C=8.39 mm D=9.5 mm	E	Position of the first pin 1: Type 1 2: Type 2
C	Number of contacts from 01 to 24	F	T: tube TC: Tube + Cap RC: Tape & Reel + Cap
D	1 Gold flash 4 Tin		