


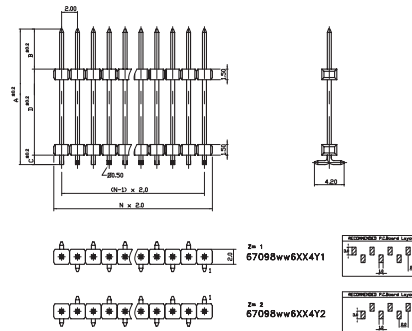

Features	Dual insulated headers, single row pitch 2.0 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Tube or T&R

Product Code

A	B	C	D	E	F
670	982x	6xx	4x	x	-x

B	See table
C	Number of contact from 02 to 40
D	Plating 0 Gold 1 Gold flash 4 Tin
E	Position of the first pin

F TC: Tube + Cap
RC: Tape & Reel + Cap

	A	B	C	D
9822	8.6	4.0	0.7	3.9
9823	10.0	3.9	0.7	5.4
9824	11.8	3.4	0.7	7.7