


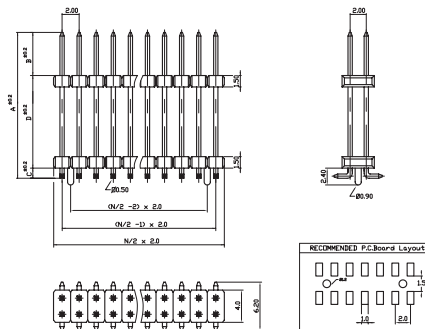

Features	Breakable header
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Tube or T&R

Product Code

A	B	C	D	E	F	G
670	98xx	6	xx	4x	x	-x

B	See table
D	Number of contact from 04 to 80
E	Plating 0 Gold 1 Gold flash 4 Tin 6 Selective gold flash

F	Locating peg 0 without 1 with
G	T: tube TC: Tube + Cap RC: Tape & Reel + Cap

	A	B	C	D
9825	8.6	4.0	0.7	3.9
9826	10.0	3.9	0.7	5.4
9827	11.8	3.4	0.7	7.7