
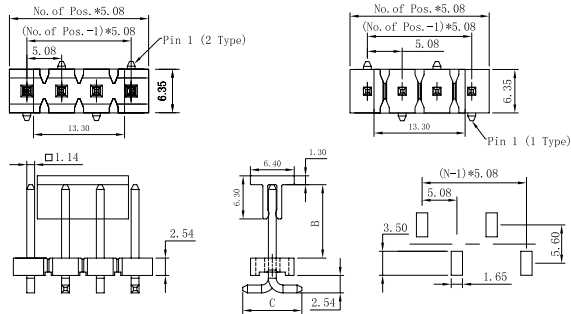


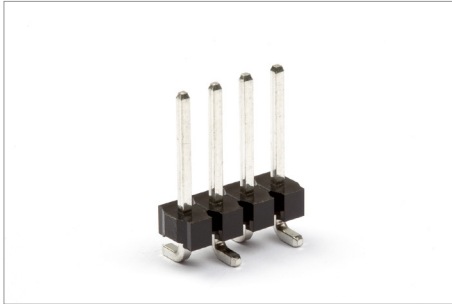

Features	Pitch 5.08 mm pin 1.14 mm Breakable header
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 7.9 A maxi 30 °C temperature rise Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating: from -40 °C to 105 °C
Packaging	Tube or Tape and Reel

Product Code

A	B	C	D	E	F
671	82xx	2xx	4x	x	-x

B	34: B=10.72 mm C=8.68 mm 35: B=12.24 mm C=8.38 mm	F	T: tube TC: Tube + Cap RC: Tape & Reel + Cap
C	Number of contacts from 01 to 20		
D	1 Gold flash 4 Tin		
E	Position of the first pin 1: Type 1 2: Type 2		