
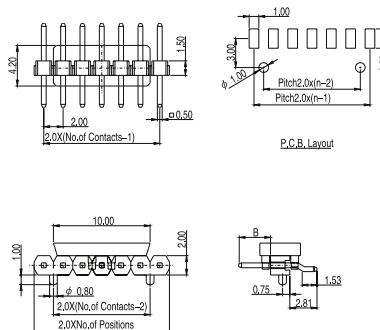


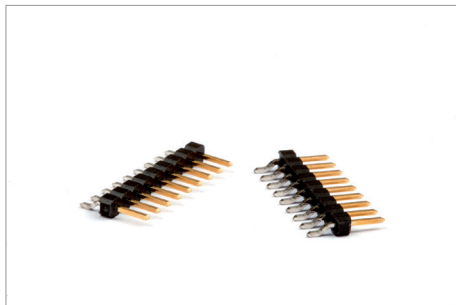

Features	Breakable header
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Tube or T&R

Product Code

A	B	C	D	E	F
671	8280	6xx	2x	x	-x

B	B= 4.45 mm
C	Number of contacts from 04 to 36
D	Plating 1 Gold flash 4 Tin 6 Selective gold flash

E	Locating peg 0 without 1 with
F	T: tube TC: Tube + Cap RC: Tape & Reel + Cap