
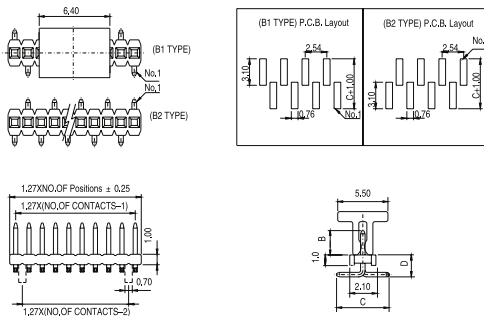


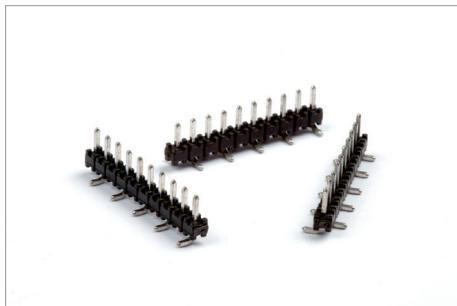

Features	Breakable header
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Tube or T&R

Product Code

A	B	C	D	E	F
671	832x	5xx	2x	x	- x

B	Standard connectors: view table
C	Number of contacts from 02 to 50
D	Plating 1 Gold flash 4 Tin 6 Selective gold flash
E	Position of the first pin (see below 1 or 2)

F

T: tube
TC: Tube + Cap
RC: Tape & Reel + Cap

	B	C	D
8320	3.0	5.5	1.7
8321	6.0	6.5	2.7