
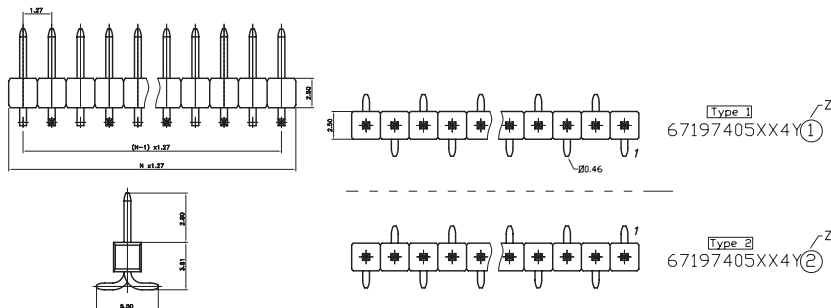


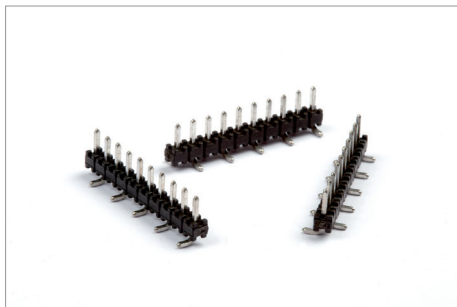

Features	Breakable header
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 M Ω mini Contact resistance: 10 m Ω max
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Tube or T&R

Product Code

A	B	C	D	E	F	G
671	9740	5	xx	2x	x	-x

D	Number of contacts from 03 to 32	G	T: tube TC: Tube + Cap RC: Tape & Reel + Cap
E	Plating 1 Gold flash 4 Tin 0 Gold 0.25 um 7 Selective gold 6 Selective gold flash		
F	Position of the first pin (see below 1 or 2)		