
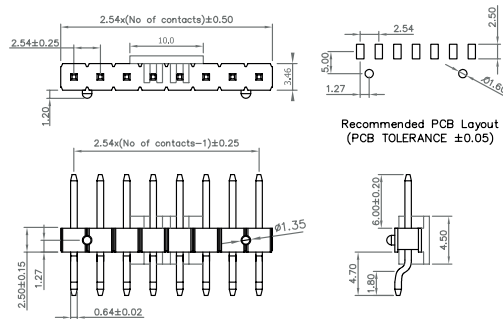


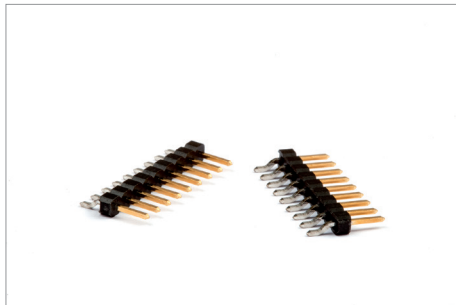

Features	Breakable header
	Insulator profile 32.5 mm
	Positioning peg
Material	Insulator:
	High temperature thermoplastic
	UL 94V0
	Contact: Brass
Electrical	Current rating: 3A maxi.
	Dielectric withstanding: 1000 V AC
	Insulation resistance: 5000 MΩ mini
Mechanical	Temperature rating:
	-40 °C to 105 °C
Packaging	Tube or T&R

Product Code

A	B	C	D	E	F	G
671	9749	1	xx	4x	1	-x

D	Number of contacts from 03 to 25	G	T: tube TC: Tube + Cap RC: Tape & Reel + Cap
E	Plating 4 *Tin 7 *Selective Gold flash 0 Gold 0.25um 1 Gold flash 6 Selective gold flash tyht		