


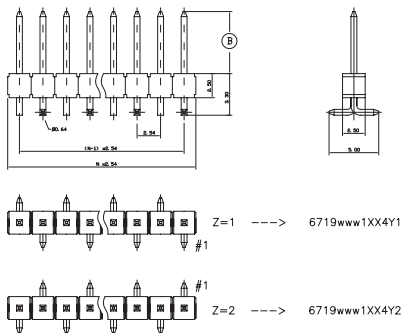

Features	Breakable header Pin side dimension 0.64 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 3A maxi Dielectric withstanding: 1000 V AC Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Tube, box or T&R

Product Code

A	B	C	D	E	F
671	9xxx	1xx	4x	x	-x

B	See table
C	Number of contacts from 02 to 40
D	Plating 4 *Tin 4 μm over Ni 1.27 μm 7 *Selective Gold 0 Gold 0.25 um 1 Gold flash
E	Position of the first pin (see below 1 or 2)

F

T: tube
TC: Tube + Cap
R: Tape & Reel
RC: Tape & Reel + Cap

Cod	B
9807	3.3
9808	5.8
9798	6.0