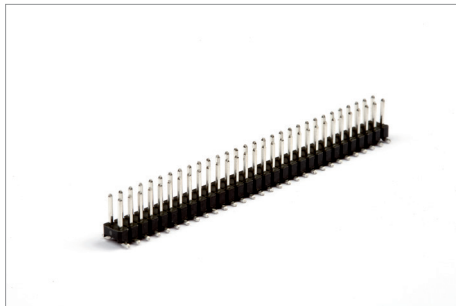


**Features** Breakable header 1.27x2.54 mm

**Material** Insulator:  
High temperature thermoplastic  
UL 94V0  
Contact: Copper alloy

**Electrical** Current rating: 1A maxi  
Dielectric withstanding: 500 V AC  
Insulation resistance: 500 MΩ mini

**Mechanical** Temperature rating:  
-40 °C to 105 °C

**Packaging** Tube or T&R

### Product Code

| A   | B    | C   | D  | E | F   |
|-----|------|-----|----|---|-----|
| 673 | 826X | 5xx | 2x | x | - x |

|          |                                                            |
|----------|------------------------------------------------------------|
| <b>B</b> | Standard connectors: view table                            |
| <b>C</b> | Number of contacts from 06 to 100<br>(for 100 mark 00)     |
| <b>D</b> | Plating<br>1 Gold flash<br>4 Tin<br>6 Selective gold flash |

|          |                                                    |
|----------|----------------------------------------------------|
| <b>E</b> | Locating peg<br>0 without<br>1 with                |
| <b>F</b> | T: tube<br>TC: Tube + Cap<br>RC: Tape & Reel + Cap |

|      | B    |
|------|------|
| 8266 | 5.84 |
| 8267 | 4.83 |