


INTERKON SMT

MALE HEADER DOUBLE ROW SMT

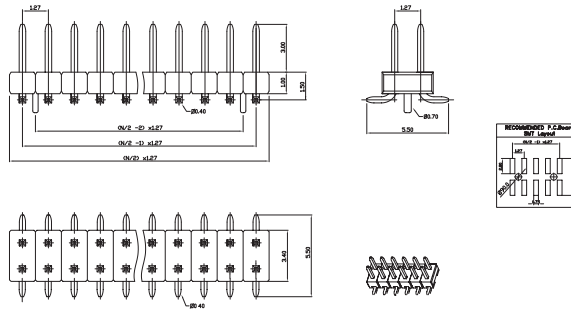

Features	Breakable header 1.27x1.27 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Tube or T&R

Product Code

A	B	C	D	E	F
673	9702	5	xx	4xy	-x

D	Number of contacts from 10 to 100 (for 100 sign 00)	F	T: tube TC: Tube + Cap RC: Tape & Reel + Cap
E	x=Plating 1 Gold flash 4 Tin 0 Gold 0.25 um 6 Selective gold flash 7 Selective gold y=0 without peg y=1 with peg		