


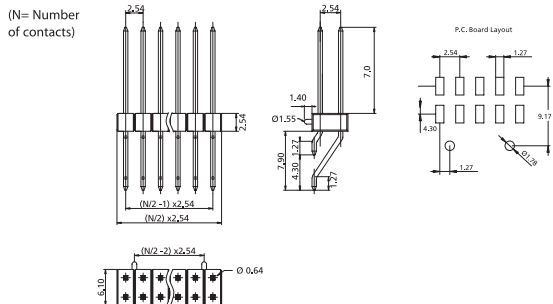

Features	Breakable header Insulator profile 2.5 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 3A maxi Dielectric withstanding: 1000 V AC Insulation resistance: 5000 MΩ mini
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Tube, box or T&R

Product Code

A	B	C	D	E	F	G
673	9812	1	xx	4x	x	-x

D	Number of contacts from 06 to 60	G	Packaging T: tube TC: Tube + Cap R: Tape & Reel RC: Tape & Reel + Cap
E	Plating 4 Tin 1 Gold flash 0 Gold 7 Selective Gold		
F	Locating peg 0 without 1 with		