
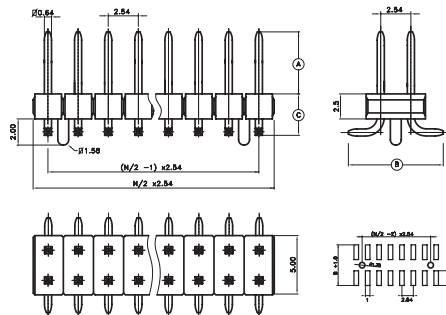


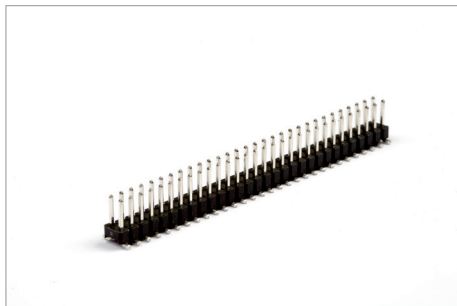

Features	Breakable header Pin side dimension 0.64 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 3A maxi. Dielectric withstanding: 1000 V AC Insulation resistance: 1 000 MΩ mini
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Tube, box or T&R

Product Code

A	B	C	D	E	F
---	---	---	---	---	---

673	98xx	1xx	4x	x	-x
-----	------	-----	----	---	----

B	See table
C	Number of contacts from 04 to 80
D	Plating 4 *Tin 4 µm over Ni 1.27 µm 7 *Selective Gold 0.2 µm over Ni 1.27 µm 0 Gold 0.25 µm 1 Gold flash 9 Gold 0.75 µm

E	Locating peg 0 without 1 with
F	T: tube TC: Tube + Cap R: Tape & Reel RC: Tape & Reel + Cap

Cod	A
9809	3.3
9810	5.8
9811	6.0