
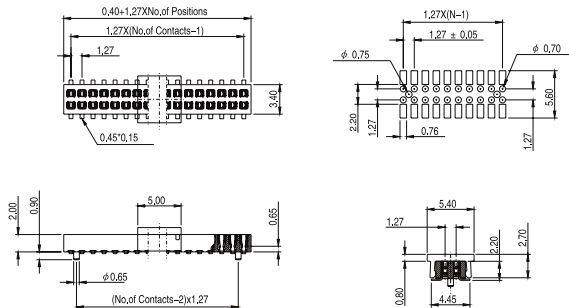


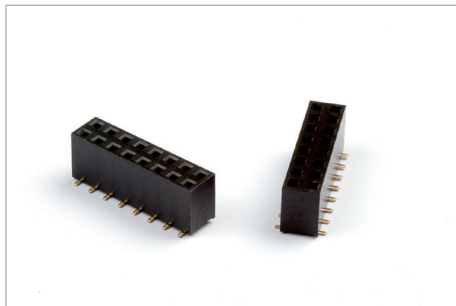

Features Pass trough socket 1.27x1.27 mm
Body height 2.2 mm

Material Insulator:
High temperature thermoplastic
UL 94V0
Contact: Phosphor bronze

Electrical Current rating: 1A maxi
Dielectric withstanding: 500 V AC
Insulation resistance: 500 MΩ mini
Contact resistance: 20 mΩ max

Mechanical Temperature rating:
-40 °C to 105 °C

Packaging Tube or T&R

Product Code

A	B	C	D	E	F
---	---	---	---	---	---

677	8012	5xx	4x	x	- x
-----	------	-----	----	---	-----

C Number of contacts from 06 to 80

D Plating
1 Gold flash
4 Tin
6 Selective gold flash

E Locating peg
0 without
1 with

F T: tube
TC: Tube + Cap
RC: Tape & Reel + Cap