
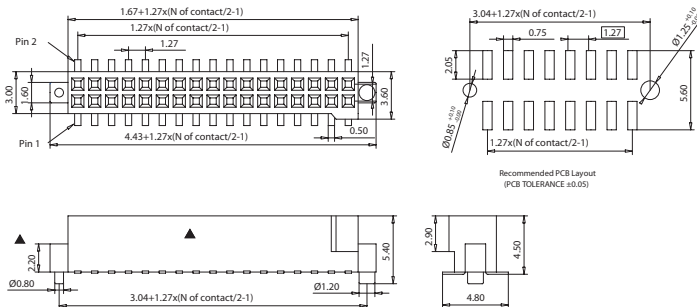


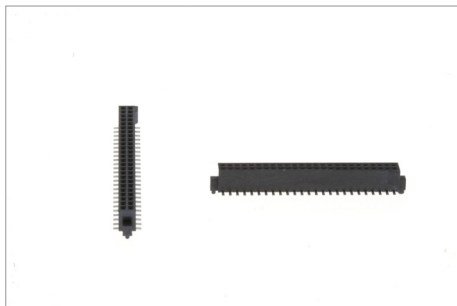

Features	Polarized socket connector
	1.27x1.27 mm
	Body height 4.5 mm
Material	Insulator:
	High temperature thermoplastic UL 94V0
	Contact: Phosphor bronze
Electrical	Current rating: 1A maxi
	Dielectric withstanding: 500 V AC
	Insulation resistance: 500 MΩ mini
	Contact resistance: 20 mΩ max
Mechanical	Temperature rating:
	-40 °C to 105 °C
Packaging	Tube or T&R

Product Code

A	B	C	D	E	F
677	8013	5xx	4x	x	- x

C	Number of contacts from 06 to 100 (for 100 mark 00)	F	T: tube TC: Tube + Cap RC: Tape & Reel + Cap
D	Plating 1 Gold flash 4 Tin 6 Selective gold flash		
E	Locating peg 0 without 1 with		