


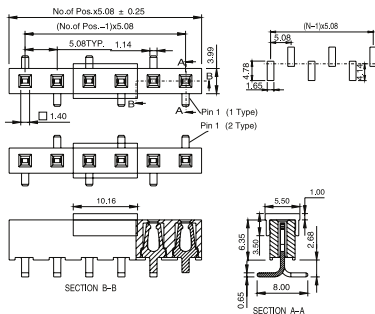

Features	Pitch 5.08 mm Socket
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Phosphor Bronze
Electrical	Current rating: 7.9 A maxi 30 °C temperature rise Contact Resistance: 10 mΩ max Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini
Mechanical	Temperature rating: from -40 °C to 105 °C
Packaging	Tube

Product Code

A	B	C	D	E	F
677	8238	2xx	4x	x	-x

C	Number of contacts from 02 to 20	F	T: tube TC: Tube + Cap RC: Tape & Reel + Cap
D	1 Gold flash 4 Tin		
E	Position of the first pin: 1: Type 1 2: Type 2		