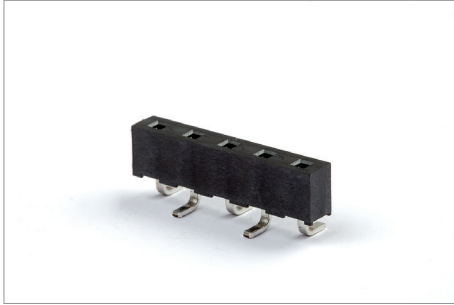


Features	Pitch 5.08 mm Socket
-----------------	----------------------

Material Insulator:
High temperature thermoplastic
UL 94V0
Contact: Phosphor Bronze

Electrical Current rating:
7.9 A maxi 30 °C temperature rise
Contact Resistance: 10 mΩ max
Dielectric withstanding: 500 V AC
Insulation resistance: 500 MΩ mini

Mechanical Temperature rating:
from -40 °C to 105 °C

Packaging	Tube or Tape and Reel
------------------	-----------------------

Product Code

A	B	C	D	E	F
677	8239	2xx	4x	x	-x

C	Number of contacts from 02 to 20
D	1 Gold flash 4 Tin
E	0: Without locking peg 1: With locking peg
F	T: tube TC: Tube + Cap RC: Tape & Reel + Cap