


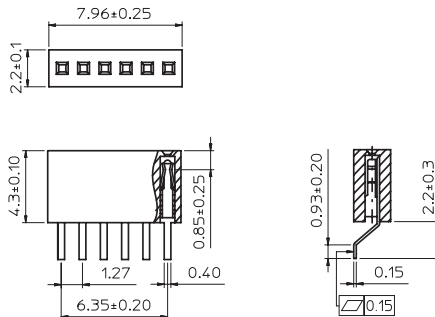

Features	Socket Body height 2 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 M Ω mini Contact resistance: 20 m Ω max
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Tube or T&R

Product Code

A	B	C	D	E
677	8268	5xx	4x0	- x

C	Number of contacts from 06 to 50
D	Plating 1 Gold flash 4 Tin 6 Selective gold flash
E	T: tube R: Tape & Reel