
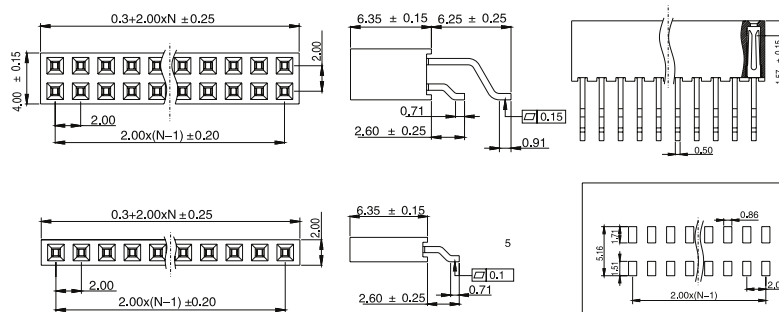


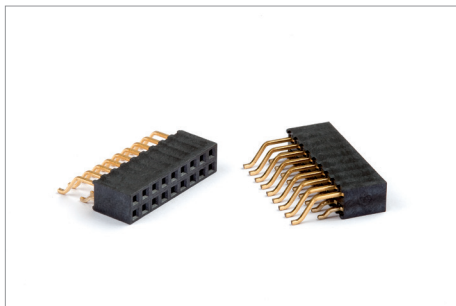

Features	Body height 2 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ max
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Tube or T&R

Product Code

A	B	C	D	E
677	829x	6xx	4x0	-x

B	Number of row 2 Single row 3 Double row	E	T: tube R: Tape & Reel
C	Number of contacts from 02 to 30 single row from 04 to 60 double row		
D	Plating 1 Gold flash 4 Tin 6 Selective gold flash		