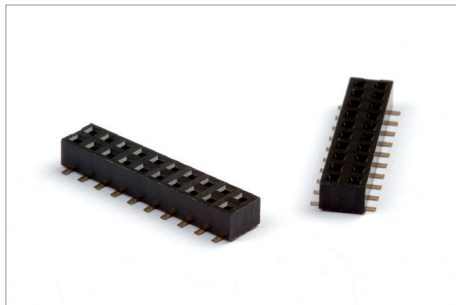


Features	Dual entry socket Body height 2.3 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ max
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D	E	F
---	---	---	---	---	---

677	8304	6xx	4x	x	-x
-----	------	-----	----	---	----

C Number of contacts from 04 to 80

D Plating
1 Gold flash
4 Tin
6 Selective gold flash

E Locating peg
0 without
1 with

F T: tube
TC: Tube + Cap
RC: Tape & Reel + Cap