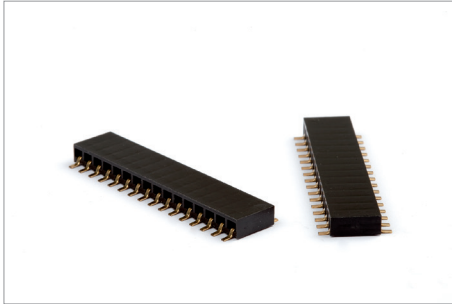


Material	Housing:
	High temperature thermoplastic UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 3A maxi
	Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ max
Mechanical	Temperature rating:
	-40 °C to 105 °C
Packaging	Tube and T&R

Product Code

A	B	C	D	E
677	8309	1xx	4x0	-x

C	Number of contacts from 06 to 80
D	Plating 1 Gold flash 4 Tin 6 Selective gold flash
E	T: tube TC: Tube + Cap RC: Tape & Reel + Cap