
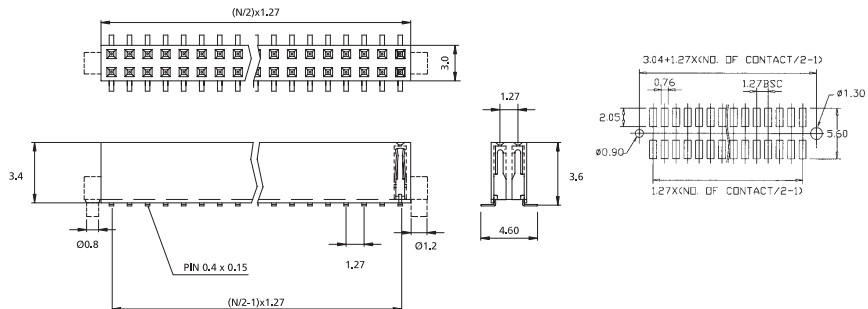


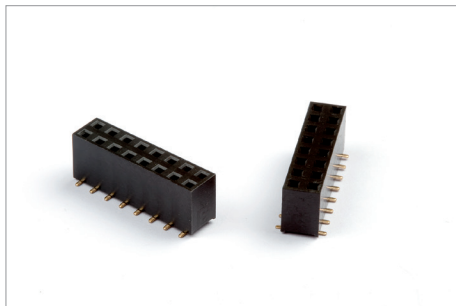

Features	Socket 1.27x1.27 mm Body height 3.4 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini Contact resistance: 30 mΩ max
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Carton box, Tube or T&R

Product Code

A	B	C	D	E	F	G
677	9707	5	xx	4x	x	- x

D	Number of contacts from 06 to 100
E	Plating 1 Gold flash 4 Tin 7 Selective gold 6 selective gold flash
F	Locating peg 0 without 1 with

G	T: tube TC: Tube + Cap R: Tape & Reel RC: Tape & Reel + Cap
----------	--