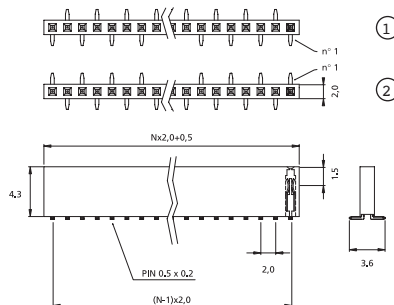
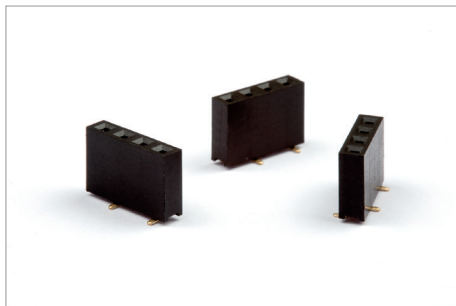


Features	Body height 4.3 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ max
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Carton box, Tube or T&R

Product Code

A	B	C	D	E	F	G
677	9734	6	xx	4x	x	-x

D	Number of contacts from 04 to 25
E	Plating 1 Gold flash 4 Tin 7 Selective gold plating 0 Gold 0.25 um 6 Selective gold flash
F	Position of the first pin see below 1 or 2

G

T: tube
TC: Tube + Cap
R: Tape & Reel
RC: Tape & Reel + Cap