



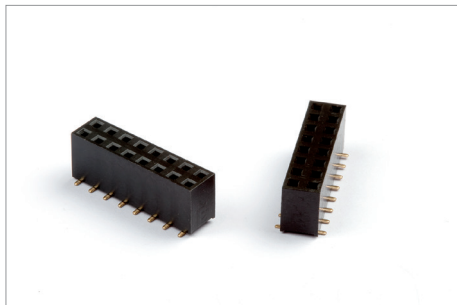

(N= Number of contacts)

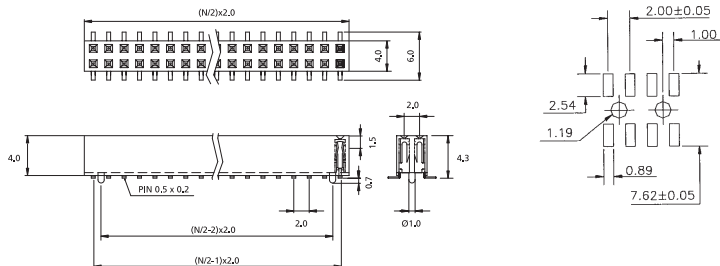

Features	Body height 4.3 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ max
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Carton box, Tube or T&R

Product Code

A	B	C	D	E	F	G
677	9735	6	xx	4x	x	-x

D	Number of contacts from 06 to 60	G	T: tube TC: Tube + Cap R: Tape & Reel RC: Tape & Reel + Cap
E	Plating 1 Gold flash 4 Tin 7 Selective gold plating 0 Gold 0.25 µm 6 Selective gold flash		
F	Locating peg (Ø 1 mm) 0 without 1 with		